

ANCHOR TRENCH (SEE DETAIL AND NOTES BELOW)

OVERLAP END JOINTS  
MINIMUM OF 6" AND STAPLE  
OVERLAP AT 1.5' INTERVALS.


DIRECTION OF  
SURFACE FLOW

STAPLE DENSITY SHALL BE A  
MINIMUM OF 3 U-SHAPED 8",  
11 GAUGE METAL STAPLES PER  
SQUARE YARD (THIS MAY VARY AS  
DIRECTED BY THE CITY).

OVERLAP  
LONGITUDINAL JOINTS  
MINIMUM OF 6"

ANCHOR TRENCH

1. DIG 6" X 6" TRENCH
2. LAY BLANKET IN TRENCH
3. STAPLE AT 1.5' INTERVALS
4. BACKFILL WITH NATURAL SOIL AND COMPACT
5. BLANKET LENGTH SHALL NOT EXCEED 100'  
WITHOUT AN ANCHOR TRENCH

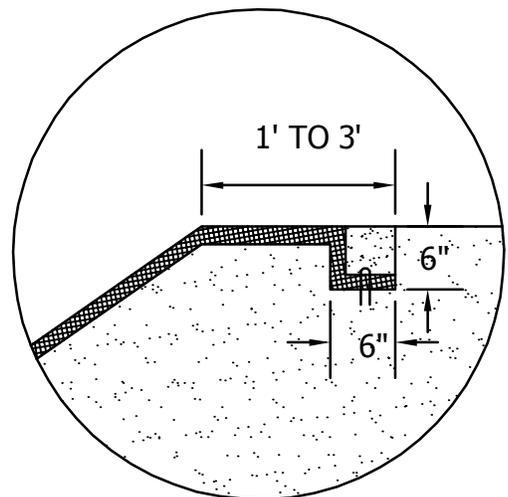

STANDARD DETAILS  
EROSION CONTROL BLANKET  
INSTALLATION

COTTAGE GROVE, MINNESOTA

LAST REVISION:  
JAN 2014

PLATE NO.  
ERO-5