


SECTION



PLAN

1. PLASTIC VALVE BOX (SEE SPECS.) W/ LOCK BOLT & Q.C. HEAT BRANDED ON COVER.
2. FINISH GRADE BELOW VALVE BOX LID (1/2" SEED, 1/2" SOD, 2" IN PLANTER BED.
3. QUICK COUPLING VALVE AS SPECIFIED.
4. PEA GRAVEL: 6" DEEP BELOW QUICK COUPLING VALVE.
5. BRICK: 2 PLACES.
6. 3/4" SCH. 80 PVC NIPPLE.
7. 3/4" SCH. 80 PVC 6" LONG NIPPLE.
8. PVC MAIN LINE.
9. 3/4" X 3" SCH. 80 NIPPLE.
10. 3/4" SCH. 80 PVC 90° ELL.
11. 2"x2"x1/4" ANGLE IRON (36" LONG) W/ STAINLESS STEEL SCREW CLAMPS MIN. (3) PLACES.
12. USE TEFLON TAPE ON ALL THREADED CONNECTIONS.

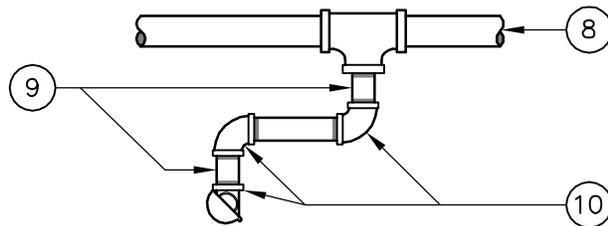

STANDARD DETAILS  
QUICK COUPLING VALVE

COTTAGE GROVE, MINNESOTA

LAST REVISION:  
JAN 2014

PLATE NO.  
IRR-5