


NO BLOCK STRUCTURES ARE ALLOWED.
STORM SEWER SHALL BE RCP

PLAN

CATCHBASIN CASTING NEENAH R-3067-V (R-3067-VB AT LOW POINTS) OR EQUAL WITH VANE GRATE 3" RADIUS CURB BOX.

MINIMUM OF 2", MAXIMUM OF 12" OF HDPE ADJUSTMENT RINGS. WOVEN FILTER FABRIC SHALL THEN BE WRAPPED AROUND HDPE RINGS. CONCRETE COLLAR SHALL BE PLACED AROUND FILTER FABRIC.

DOGHOUSES SHALL BE GROUTED ON BOTH THE INSIDE AND OUTSIDE.

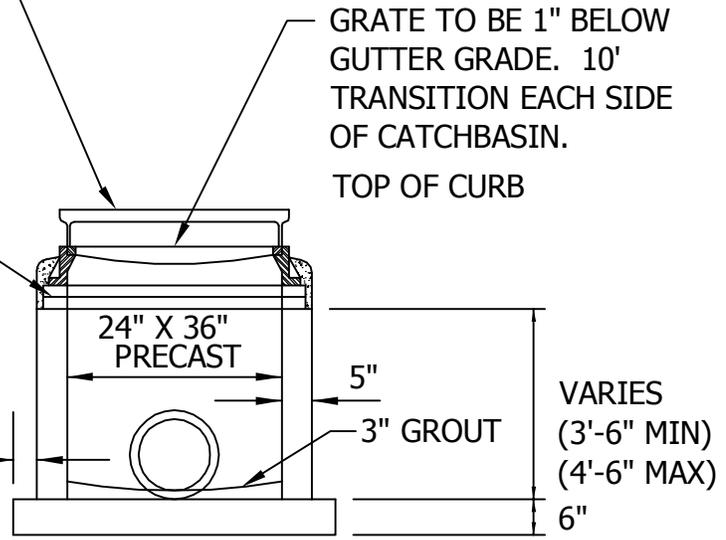

SECTION



STANDARD DETAILS

CATCHBASIN

LAST REVISION:
JAN 2014

COTTAGE GROVE, MINNESOTA

PLATE NO.
STO-7