

NO BLOCK STRUCTURES ARE ALLOWED.

PLAN


CATCHBASIN CASTING:

NEENAH R-3067-V (R-3067-VB AT LOW POINTS) OR EQUAL WITH DR OR DL GRATE 3" RADIUS CURB BOX.

MINIMUM OF 2", MAXIMUM OF 12" OF HDPE ADJUSTMENT RINGS. WOVEN FILTER FABRIC SHALL THEN BE WRAPPED AROUND HDPE RINGS. CONCRETE COLLAR SHALL BE PLACED AROUND FILTER FABRIC.

DOGHOUSES SHALL BE GROUTED ON BOTH THE INSIDE AND OUTSIDE.

NO DRAIN HOLES

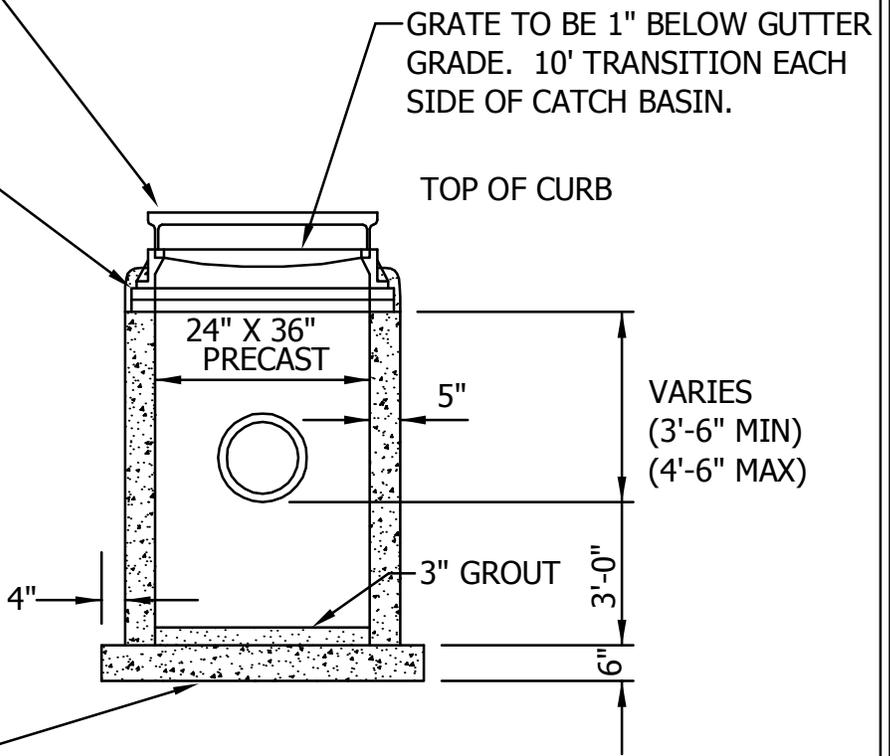

SECTION



STANDARD DETAILS  
CATCHBASIN WITH SUMP

COTTAGE GROVE, MINNESOTA

LAST REVISION:  
JAN 2014

PLATE NO.  
STO-8