


NEENAH R-3067-VB CATCH BASIN FRAME AND GRATE. SHALL BE FURNISHED WITH CURB INLET BOX AND 3" DIA. FRONT FACE AND 4" MAXIMUM OPENING.

HIGH DENSITY POLYETHYLENE (HDPE) ADJUSTMENT RINGS. MIN. OF 2", MAX. OF 12". WOVEN FILTER FABRIC THEN SHALL BE WRAPPED AROUND ENTIRE SYSTEM AS SPECIFIED. CONCRETE COLLAR REQUIRED AROUND WOVEN FABRIC ON ALL CATCH BASINS.

A CONCRETE COLLAR SHALL BE PLACED AROUND FILTER FABRIC ON ALL STORM SEWER STRUCTURES

CATCH BASIN STRUCTURE WITH TOP SLAB OR 2' X 3' BOX.

WOVEN FILTER FABRIC

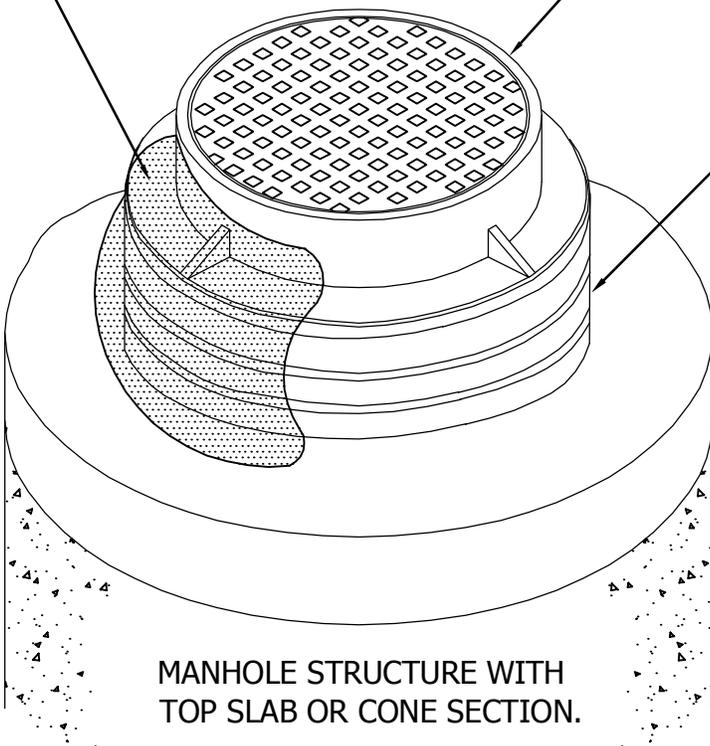

NEENAH R1642B MANHOLE FRAME AND COVER. SHALL BE FURNISHED WITH 2 CONCEALED PICK HOLES AND STAMPED "SANITARY SEWER" OR "STORM SEWER".

HIGH DENSITY POLYETHYLENE (HDPE) ADJUSTMENT RINGS. MIN. OF 2", MAX. OF 12", BONDED TO THE STRUCTURE, CASTING, AND EACH OTHER BY APPROVED SEALANT. WOVEN FILTER FABRIC THEN SHALL BE WRAPPED AROUND THE ENTIRE SYSTEM AS SPECIFIED.

CONCRETE COLLAR REQUIRED AROUND WOVEN FABRIC ON ALL STORM SEWER MANHOLE STRUCTURES.

MANHOLE STRUCTURE WITH TOP SLAB OR CONE SECTION.



STANDARD DETAILS
CATCHBASIN AND MANHOLE
ADJUSTMENT

COTTAGE GROVE, MINNESOTA

LAST REVISION:
JAN 2014

PLATE NO.
STR-24